

Product Is Not Recommended for New Design.  
The next generation of higher performance products are in development. Visit our online Selector Guides (<http://mot-sps.com/rf/sg/html>) for scheduled introduction dates.

# MRF185

## The RF MOSFET Line



# RF POWER

# Field-Effect Transistor

## N-Channel Enhancement-Mode Lateral MOSFET

85 WATTS, 1.0 GHz  
28 VOLTS  
LATERAL N-CHANNEL  
BROADBAND  
RF POWER MOSFET

- High Gain, Rugged Device
- Broadband Performance from HF to 1 GHz
- Bottom Side Source Eliminates DC Isolators, Reducing Common Mode Inductances

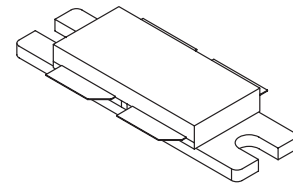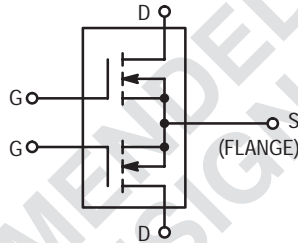

CASE 375B-02, STYLE 2

### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	65	Vdc
Gate-Source Voltage	$V_{GS}$	$\pm 20$	Vdc
Storage Temperature Range	$T_{stg}$	- 65 to +150	$^{\circ}C$
Operating Junction Temperature	$T_J$	200	$^{\circ}C$
Total Device Dissipation @ $T_C = 25^{\circ}C$ Derate above $25^{\circ}C$	$P_D$	250 1.45	Watts W/ $^{\circ}C$

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.7	$^{\circ}C/W$

### ELECTRICAL CHARACTERISTICS ( $T_C = 25^{\circ}C$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

### OFF CHARACTERISTICS

Drain-Source Breakdown Voltage ( $V_{GS} = 0 V, I_D = 1 \mu A_{dc}$ )	$V_{(BR)DSS}$	65	-	-	Vdc
Zero Gate Voltage Drain Current ( $V_{DS} = 28 V, V_{GS} = 0 V$ )	$I_{DSS}$	-	-	1	$\mu A_{dc}$
Gate-Source Leakage Current ( $V_{GS} = 20 V, V_{DS} = 0 V$ )	$I_{GSS}$	-	-	1	$\mu A_{dc}$

NOTE - **CAUTION** - MOS devices are susceptible to damage from electrostatic charge. Reasonable precautions in handling and packaging MOS devices should be observed.

**ELECTRICAL CHARACTERISTICS – continued** ( $T_C = 25^\circ\text{C}$  unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

**ON CHARACTERISTICS**

Gate Quiescent Voltage ( $V_{DS} = 26\text{ V}$ , $I_D = 300\text{ mA}$ per side)	$V_{GS(Q)}$	3	4	5	Vdc
Delta Quiescent Voltage between sides ( $V_{DS} = 26\text{ V}$ , $I_D = 300\text{ mA}$ per side)	$\Delta V_{GS(Q)}$	–	0.15	0.3	Vdc
Drain–Source On–Voltage ( $V_{GS} = 10\text{ V}$ , $I_D = 3\text{ A}$ per side)	$V_{DS(on)}$	–	0.75	1	Vdc
Forward Transconductance ( $V_{DS} = 10\text{ V}$ , $I_D = 3\text{ A}$ per side)	$g_{fs}$	1.6	2	–	s


**DYNAMIC CHARACTERISTICS**

Output Capacitance ( $V_{DS} = 28\text{ V}$ , $V_{GS} = 0\text{ V}$ , $f = 1\text{ MHz}$ )	$C_{oss}$	–	38	–	pF
Reverse Transfer Capacitance ( $V_{DS} = 28\text{ V}$ , $V_{GS} = 0\text{ V}$ , $f = 1\text{ MHz}$ )	$C_{rss}$	–	4.6	6	pF

**FUNCTIONAL CHARACTERISTICS**


Common Source Power Gain ( $V_{DD} = 28\text{ V}$ , $P_{out} = 85\text{ W}$ , $f = 960\text{ MHz}$ , $I_{DQ} = 600\text{ mA}$ )	$G_{ps}$	11	14	–	dB
Drain Efficiency ( $V_{DD} = 28\text{ V}$ , $P_{out} = 85\text{ W}$ , $f = 960\text{ MHz}$ , $I_{DQ} = 600\text{ mA}$ )	$\eta$	45	53	–	%
Load Mismatch ( $V_{DD} = 28\text{ Vdc}$ , $P_{out} = 85\text{ W}$ , $f = 960\text{ MHz}$ , $I_{DQ} = 600\text{ mA}$ , Load VSWR 5:1 at All Phase Angles)	$\Psi$	No Degradation in Output Power			

## PACKAGE DIMENSIONS

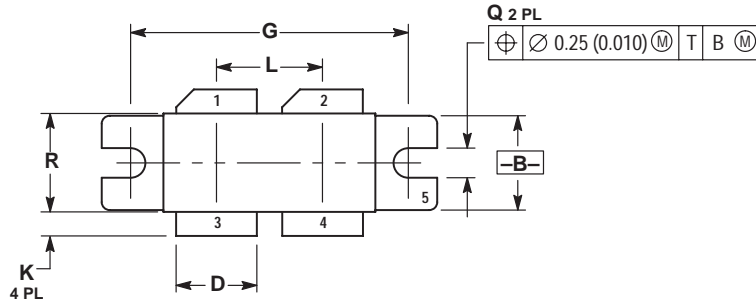


- NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.330	1.350	33.79	34.29
B	0.375	0.395	9.52	10.03
C	0.180	0.210	4.57	5.33
D	0.320	0.340	8.13	8.64
E	0.060	0.070	1.52	1.77
F	0.004	0.006	0.11	0.15
G	1.100 BSC		27.94 BSC	
H	0.093	0.108	2.36	2.74
K	0.085	0.115	2.16	2.92
L	0.425 BSC		10.80 BSC	
N	0.845	0.875	21.46	22.23
Q	0.118	0.130	3.00	3.30
R	0.390	0.410	9.91	10.41

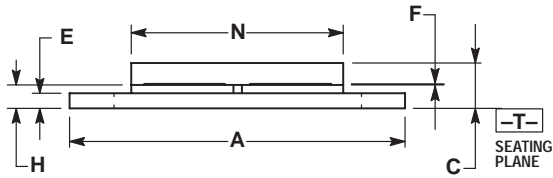

- STYLE 2:  
 PIN 1. DRAIN  
 2. DRAIN  
 3. GATE  
 4. GATE  
 5. SOURCE

**CASE 375B-02  
 ISSUE A**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

**How to reach us:**

**USA/EUROPE/Locations Not Listed:** Motorola Literature Distribution;  
P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

**JAPAN:** Motorola Japan Ltd.; SPS, Technical Information Center, 3-20-1,  
Minami-Azabu, Minato-ku, Tokyo 106-8573 Japan. 81-3-3440-3569

**Customer Focus Center: 1-800-521-6274**

**Mfax™:** RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609  
Motorola Fax Back System – US & Canada ONLY 1-800-774-1848  
– <http://sps.motorola.com/mfax/>

**ASIA/PACIFIC:** Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre,  
2, Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.  
852-26668334

**HOME PAGE:** <http://motorola.com/sps/>

