


USB, Ausführung B-Mini, 5-Polig, SMD

USB, version B-Mini, 5-poles, SMD



Isolierkörper

Nylon PA9T

Kontakte

Phosphorbronze, t=0.25mm

Gehäuse

Messing t=0.3mm
Oberfläche: Vernickelt

Durchschlagsspannung

500V AC

Isolationswiderstand

1000MΩ min.

Nennspannung und Strom

1.5A bei 250V AC minimum

Insulator

Nylon PA9T

Contacts

Phosphorbronze, t=0.25mm

Shell

Brass t=0.3
Finish: Nickel Plated

Withstanding voltage


500V AC

Insulation resistance

1000MΩ min.

Rated voltage and current

1.5A at 250V AC minimum

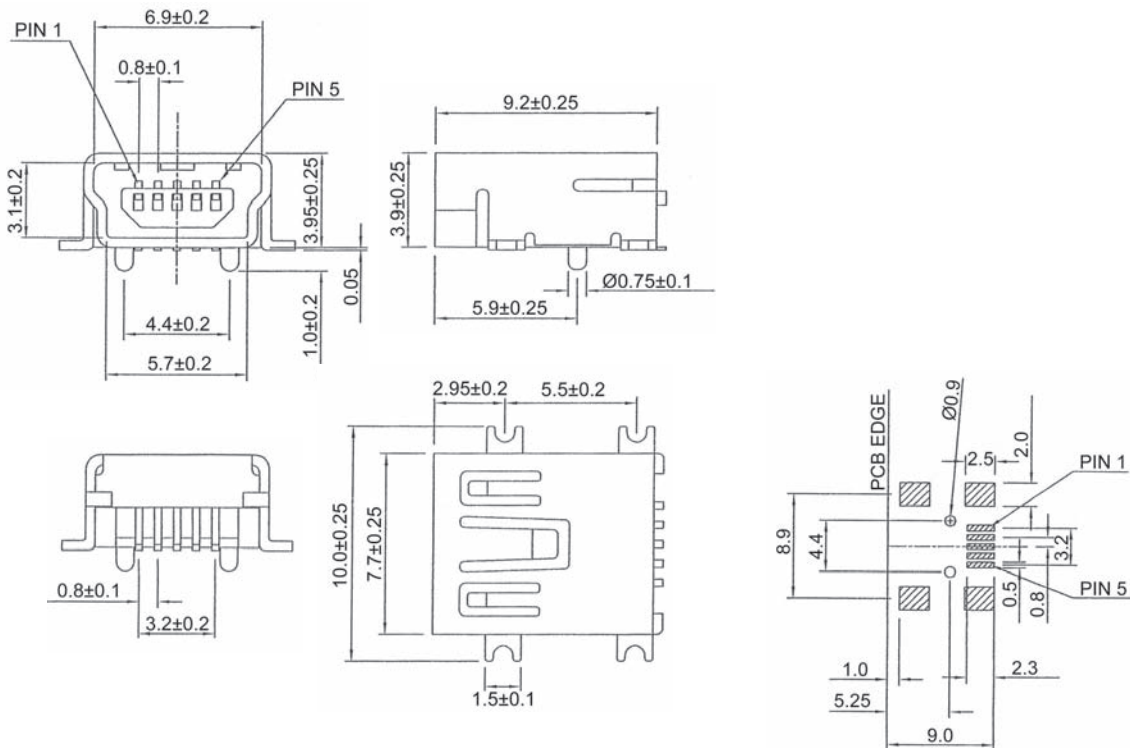

Bestellcode : **A - USBB - M5/SMD**
 Ordercode :